




Connect-i

Connect-i is a great plus to the electronic guard tour control system, given the fact that the follow up is done on line, which does not require a supervisor to constantly visit the site to check up on things.

Connect-i integrates **Guard-i's** electronic guard tour control with any monitoring central station through an alarm panel. This accessory enables the back up personnel at the central station to do an on-line follow up of the patrol officer's activities. In case the guard fails to complete his rounds, the monitoring central station is promptly notified and immediate action may be taken.

Connect-i works by using one or two zones on an alarm panel, and it will contact the monitoring central station just as a PIR sensor would. These zones refer to "correctly performed rounds" and "faulty rounds". The guard uses **Guard-i** to check all the points in his round and "confirms" a successfully completed round by touching **Connect-i** with his **Guard-i**, thus activating the corresponding zone. In most cases only one zone on the panel is used, for the notification of faulty rounds.

Connect-i may be connected to any central monitoring station available in the market, thus allowing the user to use the one he may already have or to choose freely from the wide range offered in the market.

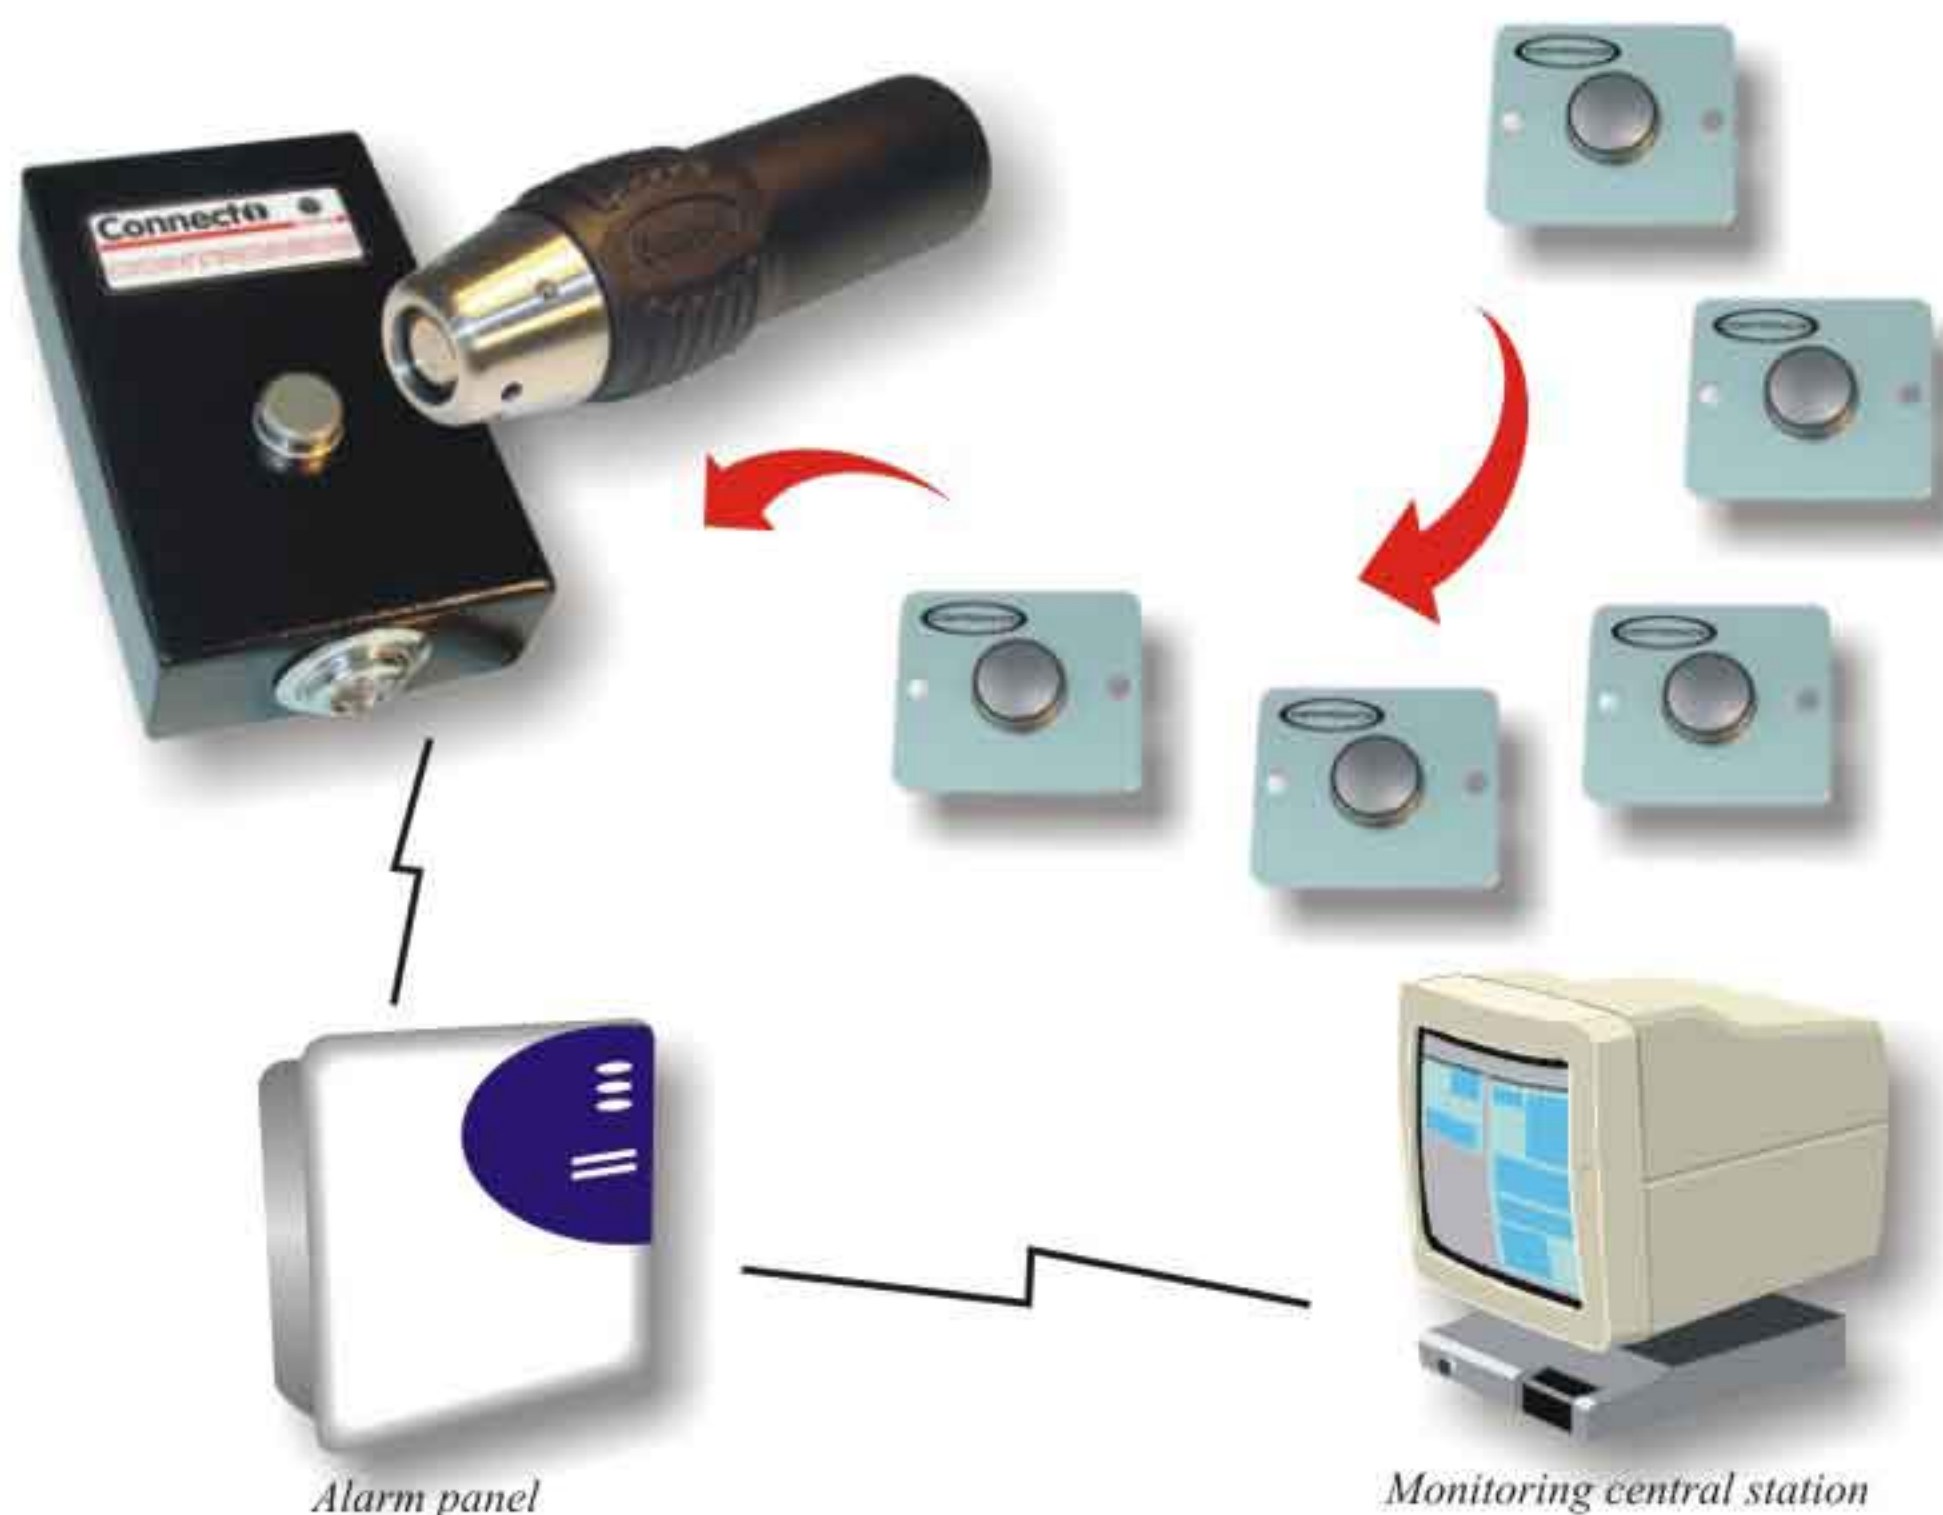

TECHNICAL SPECIFICATIONS



Physical characteristics: Compact and resistant metal case with push-in lock in its base. Connect-i remains locked during all operations

Dimensions: 120mm x 76,5mm x 33,2mm (4.725" x 3.0" x 1.275")

Weight: 480g (7.9 oz)

Memory: 32 kb non volatile

Capacity: Holds complete programming information from any Guard-i

Operating Temperature: 0° to 55°C (32°F to 131°F)

Humidity Tolerance: above 95% non-condensing

Power Supply: External from 6V to 18V DC on the alarm panel

Serial Communication: Transfer rate of 115200bps. Communication with a Guard-i completes within 10 seconds

Signaling: Tricolor LED

Relay Signal Activation Time: 5 seconds

Code: CN-i

Authorized Distributor :
PT. SAPTAKENCANA KHARISMA JAYA
Ruko Sentra Blok B-12
Jl. Pangeran Jayakarta No. 126-129
Jakarta 10730 - Indonesia
Telp. +62-21-6243466, Fax. +62-21-6243461
Email : sales@saptakencana.com

Contronics Automação Ltda.
Rua Lauro Linhares, 589
88036-002 • Florianópolis • SC • BRAZIL

Tel.: +55 48 2106-2222
Fax: +55 48 2106-2211

